



M A T E R I A L S	BODY	PASSIVATED STAINLESS STEEL
	CONTACT	GOLD PLATED
	INSULATOR	PTFE
E P L R E O C P T E R R I T C I A E L S	IMPEDANCE (OHM)	50
	FREQUENCY RANGE (GHz)	DC - 2
	VSWR (MAX)	1.15:1
	INPUT POWER (WATTS)	2
	ATTENUATION (dB)	1
	ACCURACY (dB)	+/- .3
	OPERATING TEMP. RANGE (°C)	-65 to +125



Scale 2:1

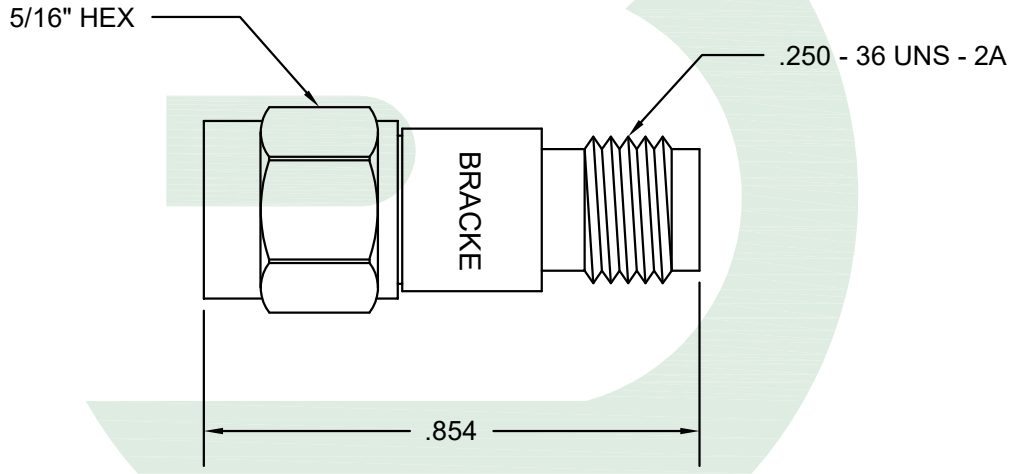

BRACKE
Bracke Manufacturing, LLC



Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number	
BM10001.1	
Produced By	Checked By
002	013

Description	
SMA Male to Female, 1 dB 50 Ohm [Attenuator, Max VSWR 1.15:1 @ 2 GHz]	
Notes	
<ul style="list-style-type: none"> • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 	
©2022 Bracke Manufacturing, LLC	

CAGE / NAGE	
6LOW2	
Scale	Unit
3:1	Inches
Date	Revision
10/14/2022	A-01